


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: 0148/0 & P/N: 0201  
INSULATOR: HEAT SHRINK TUBING 221. BLACK.  
BODY: BRASS. 40µ [1.02µm] MIN GOLD OVER NICKEL PLATED.  
CONTACT: BeCu OR PHOSPHOR BRONZE. 40µ [1.02µm] MIN GOLD OVER NICKEL PLATED.
- P/N: W-701/COLOR  
28AWG 19X40 TINNED COPPER  
0.047 [1.19] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.
- PERFORMANCE  
MAXIMUM CURRENT: 1.0 AMPS  
MAXIMUM VOLTAGE: 600 W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

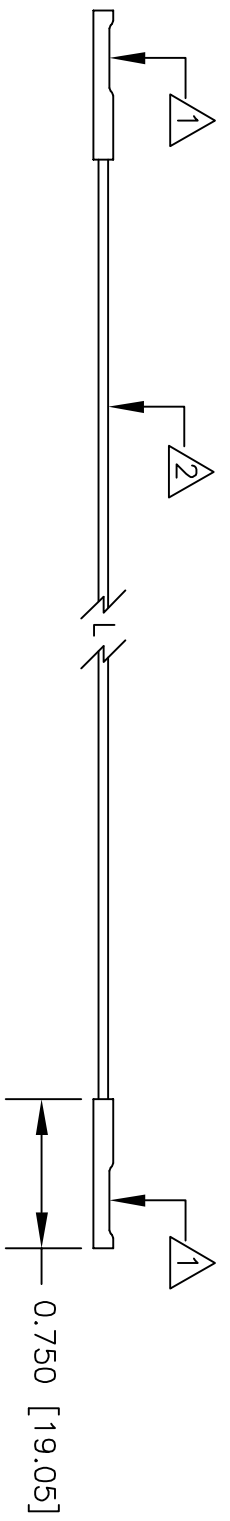

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.		DESCRIPTION		
±	.XX ±	±	APPROVALS	DATE	<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
±	.XXX ±	±	DRAWN	R.L.		0.025 [0.64] SQ. SOCKET
±		±	APPROVED BY	10/10		JUMPER
MATERIAL SEE NOTE.		FINISH SEE NOTE.		SIZE CODE IDENT NO. DRAWING NO.		
NEXT ASSY USED ON		APPLICATION		A 08505 9120		
DO NOT SCALE DRAWING		SCALE		1:1		
		SHEET 1 OF 1		REV.		

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.